




BUILD

ALUMINIUM

A DIVISION OF PRESTIGE PRESSINGS AND COMPONENTS

Standard 30,5mm Casement Window Range

Maximum sash size: width 600mm height 600mm. All dimensions indicated are normal opening sizes. Deduct 10mm for actual overall window size. Windows 1800mm and wider get 900mm vents. P4TT windows get 600mm wide vents.

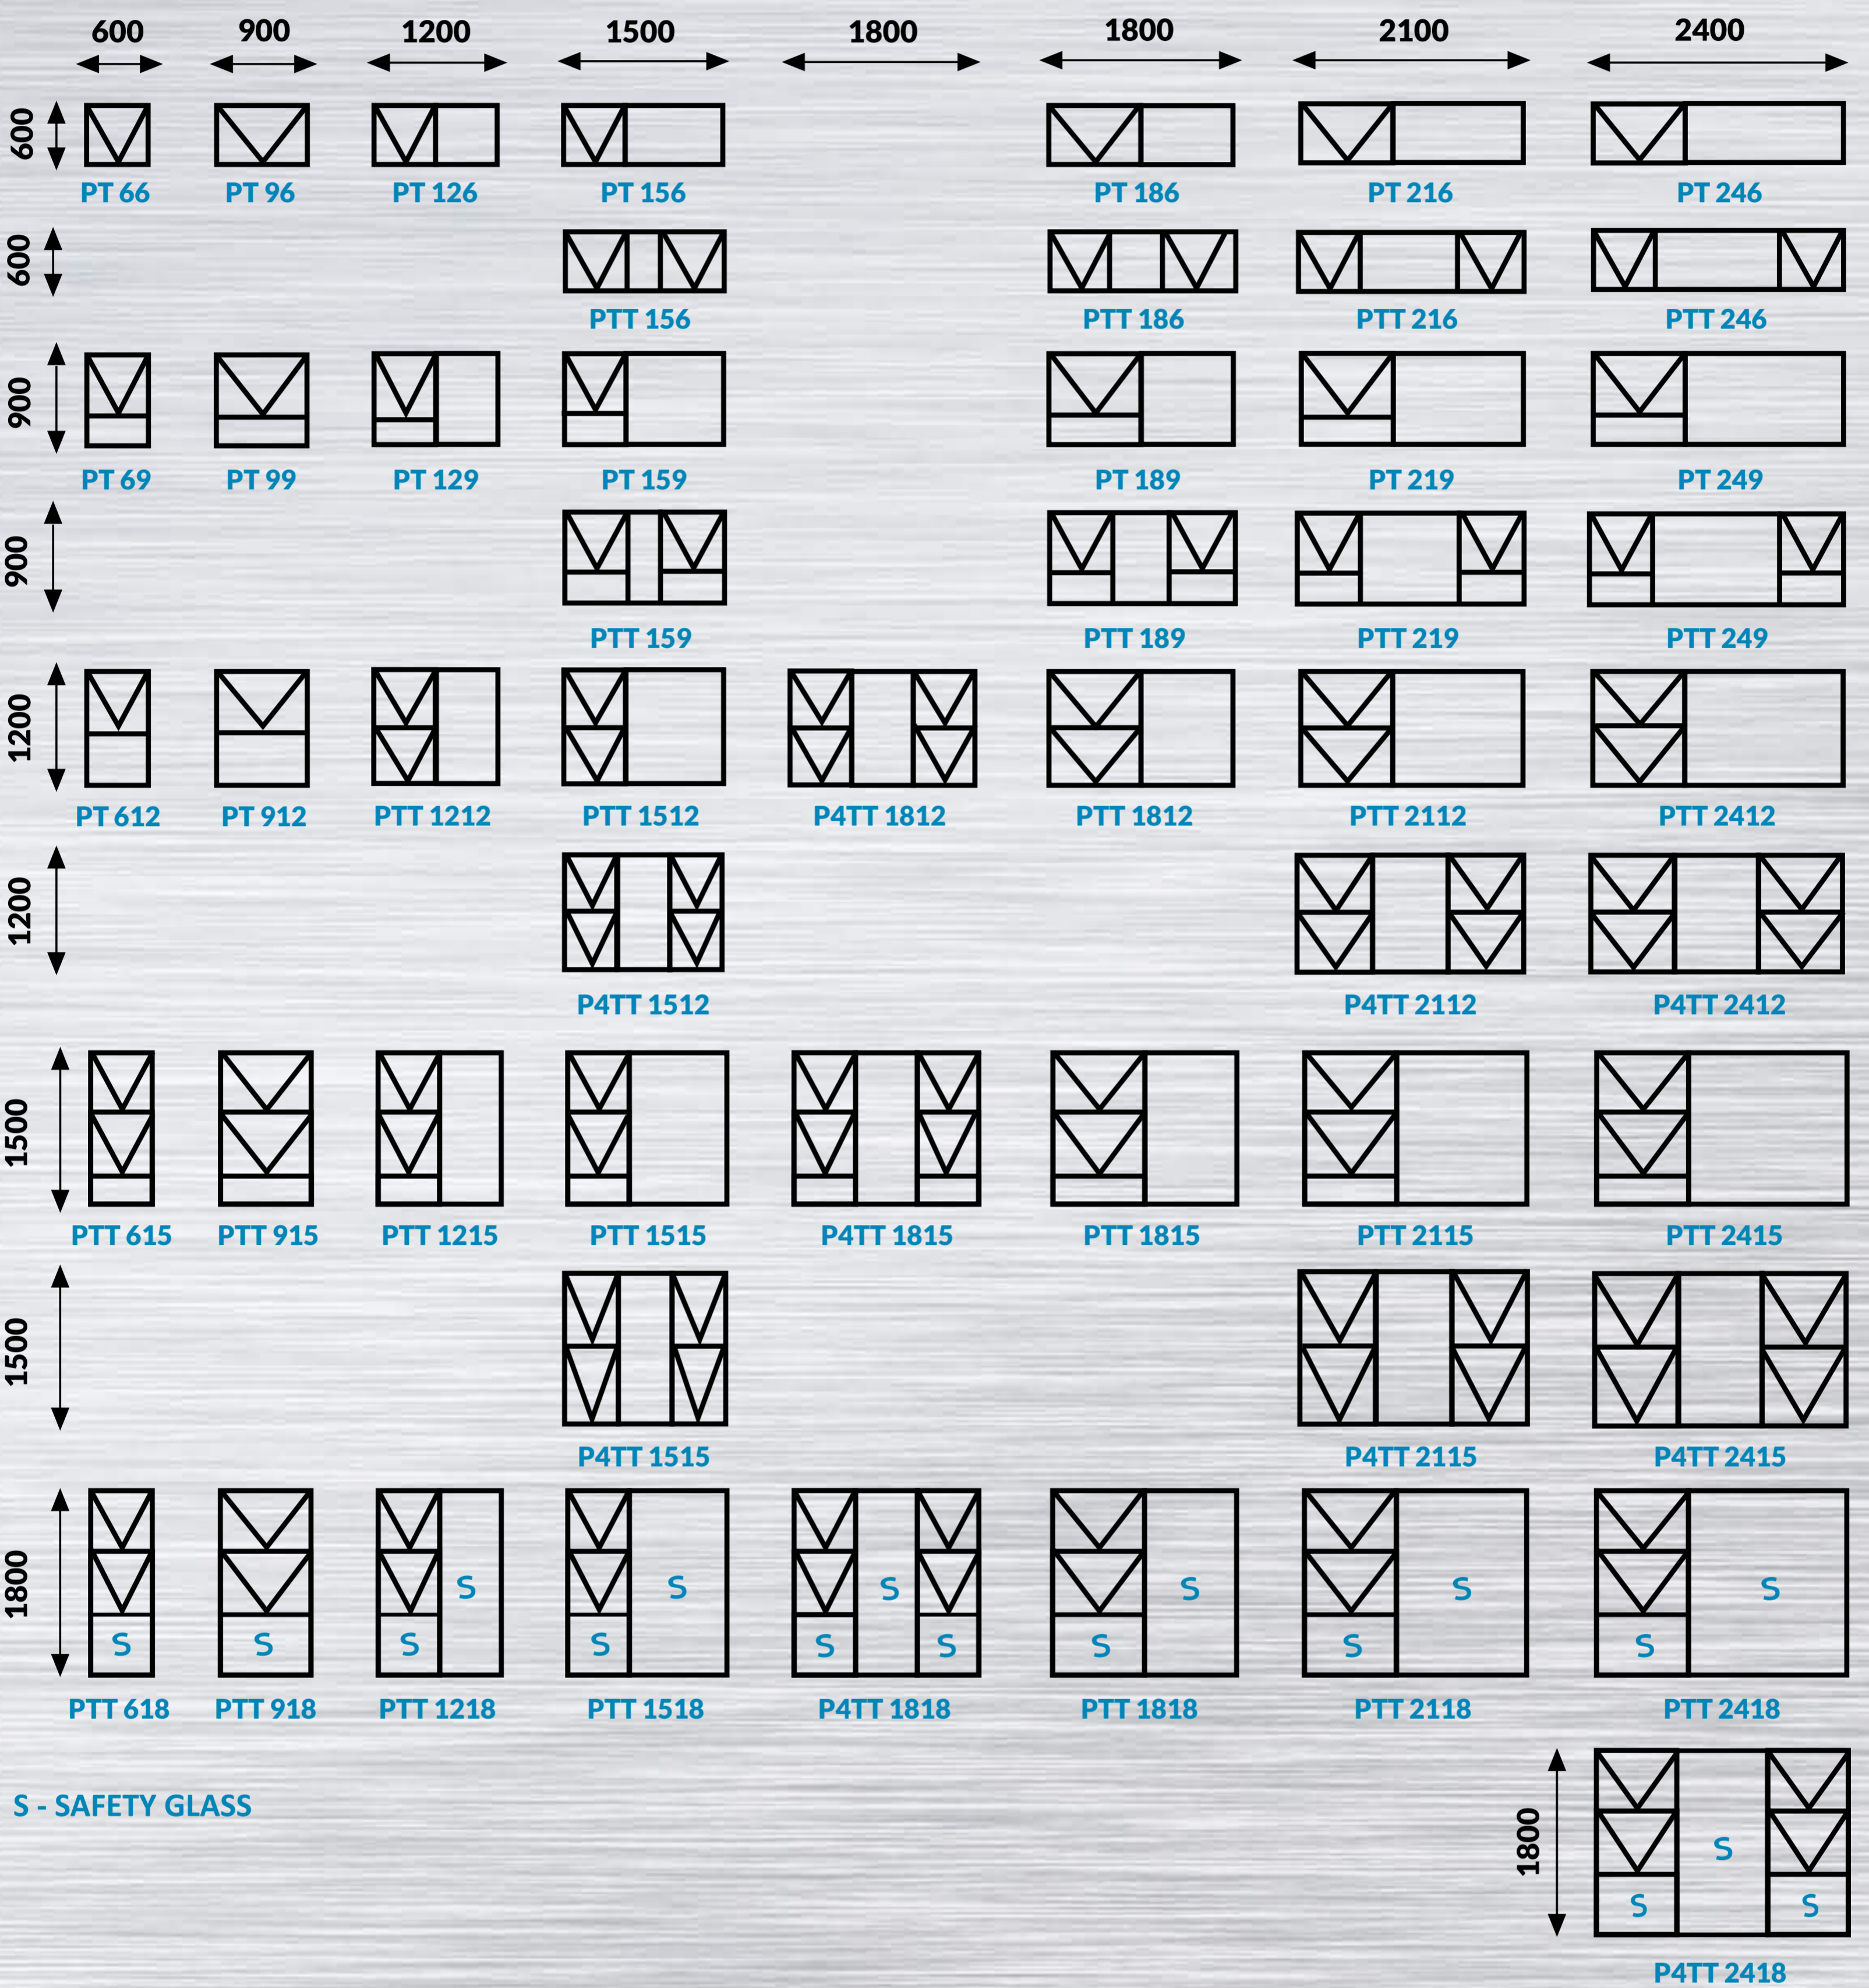

Residential Windows

Special Features:

- A high quality low cost window requiring minimum maintenance.
- For use in residential and architectural projects.
- Project top hung sashes on concealed friction stays, all sashes are fitted with draught seal to prevent water and air infiltration.
- Window corners are mechanically crimped and sealed.
- All windows come complete with fixing lugs, handles, stainless steel screws.
- All windows are factory glazed to N part glazing regulations.
- Aluminium extrusions anodised to coastal specifications of 25 microns.
- All hardware to coastal specifications of 304 stainless steel quality.
- Windows available in a PT (one vent) – PTT (two vents) – P4TT (four vents) configuration.
- Viewed from the outside all vents as a standard on the left hand side, if vents are required on the right this needs to be specified.



Windows and doors available in the following colours:



COST SAVING



NO WEATHERING OR RUSTING



QUICK AND EASY TO INSTALL



LOW MAINTENANCE

Please note that the colour swatches used is only for illustrative purposes and not exact replica of final product colour.




BUILD ALUMINIUM

A DIVISION OF PRESTIGE PRESSINGS AND COMPONENTS




Standard Sliding Doors

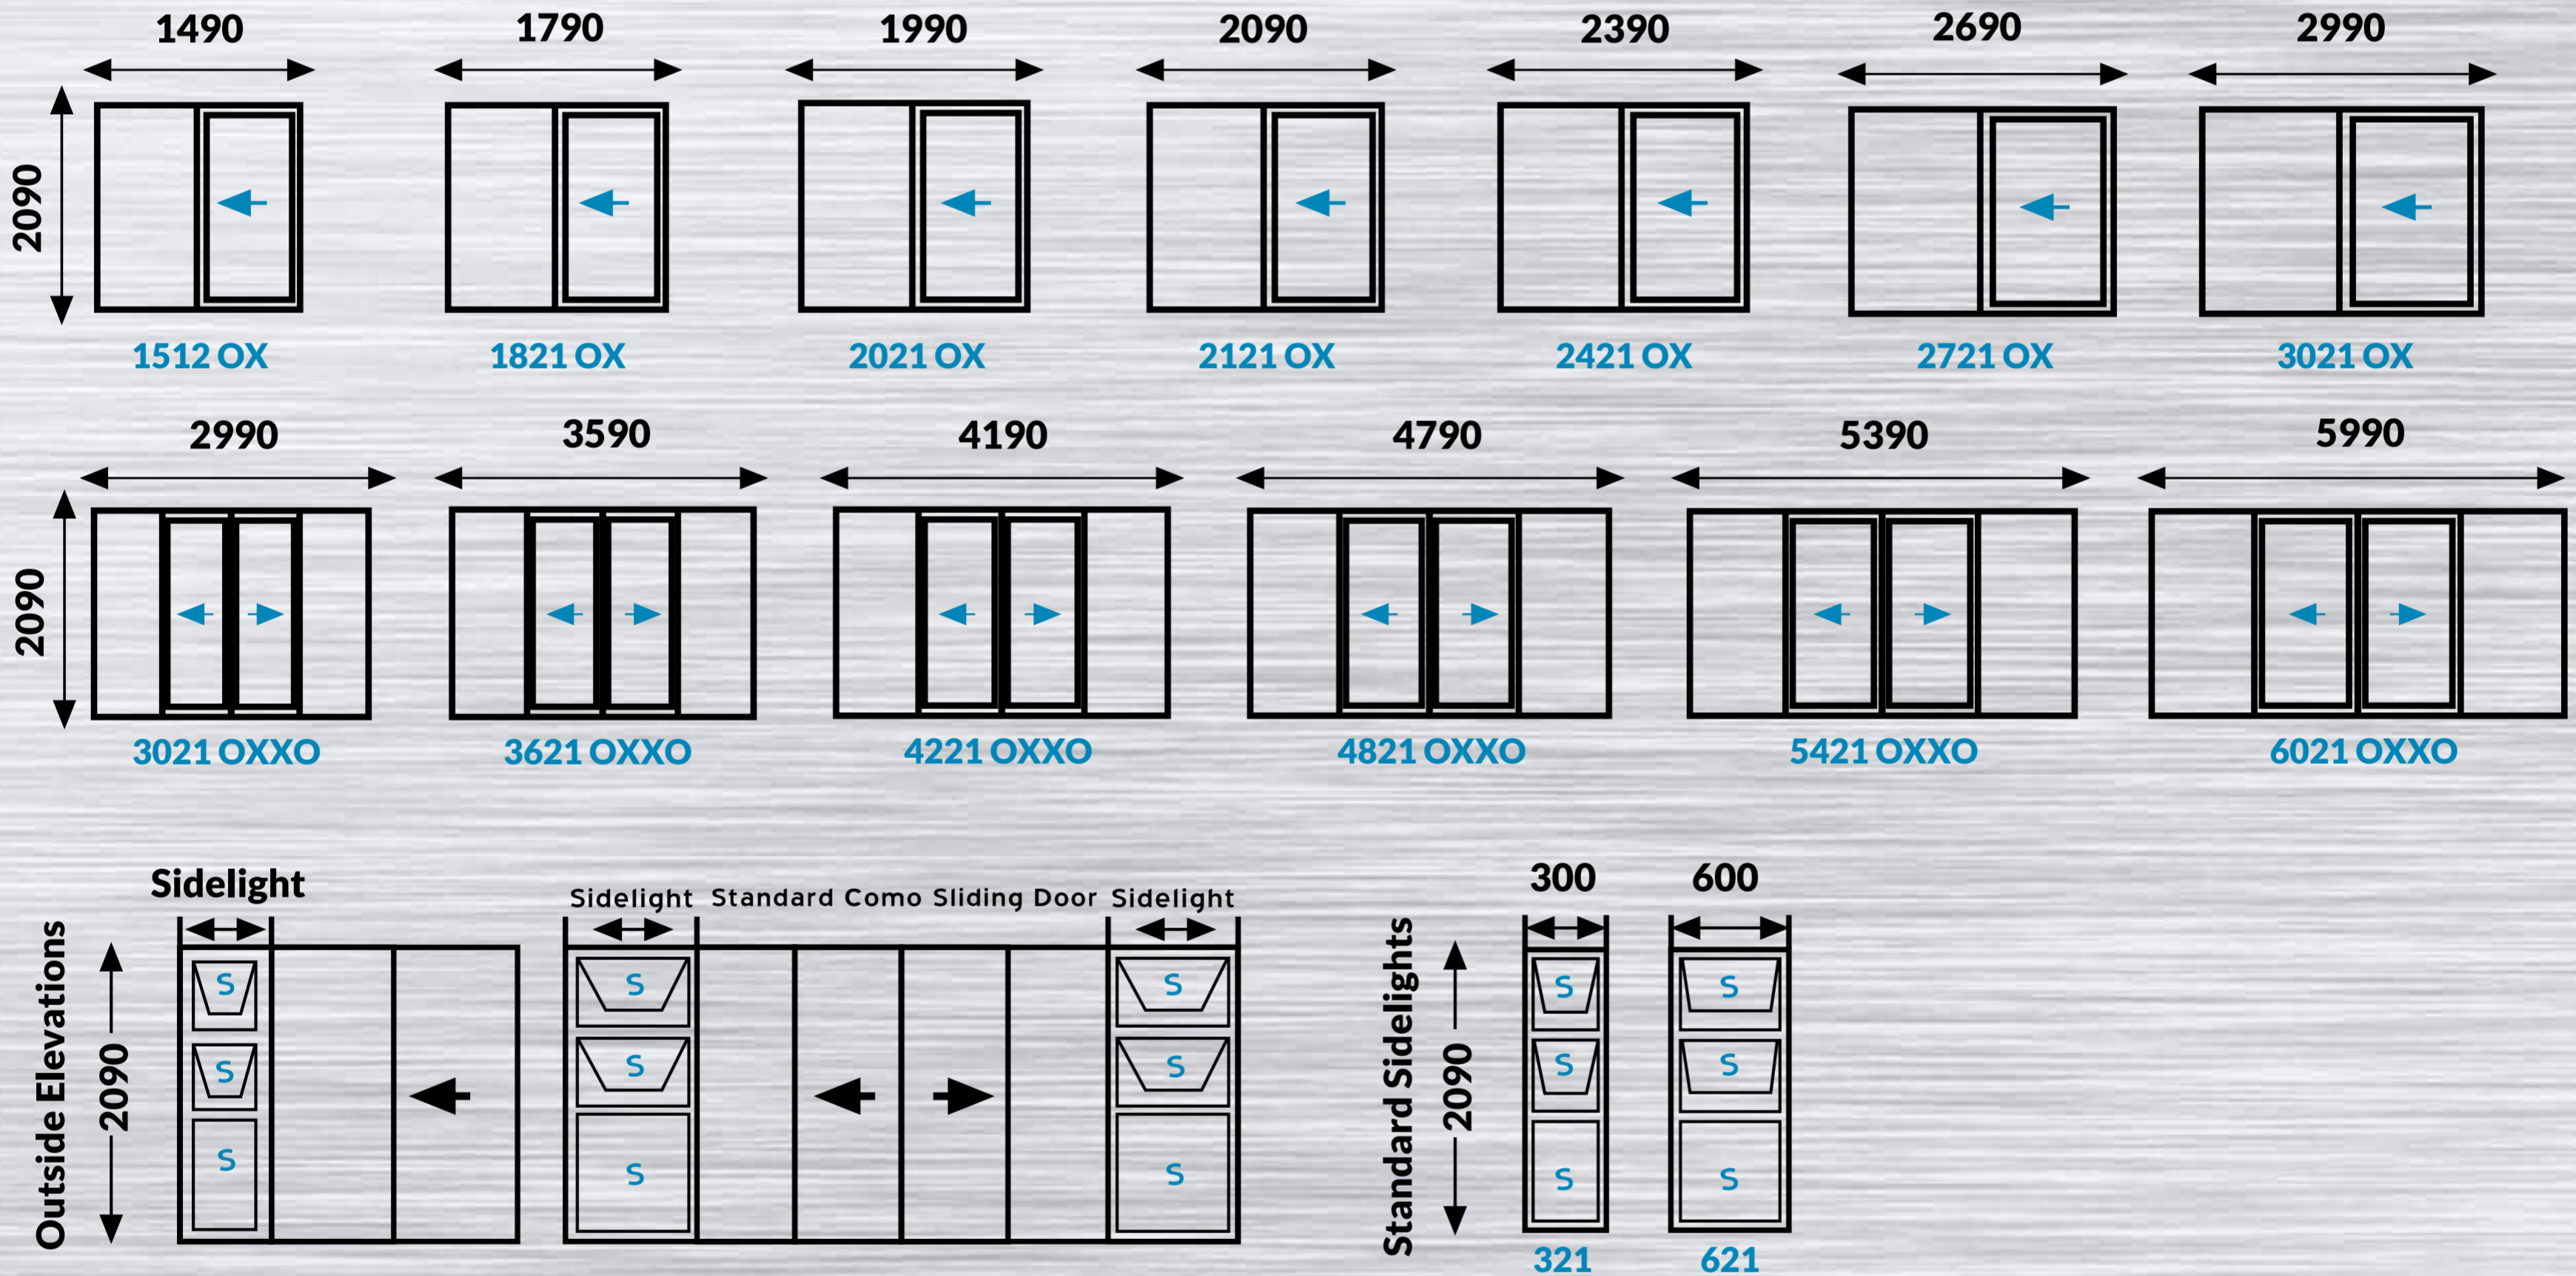

Sliding Doors

Special Features:

- A high quality Sliding Door requiring minimum maintenance.
- For use in residential and architectural projects.
- Aluminium extrusions anodized to coastal specifications of 25 microns.
- Sliding Doors are glazed with Toughened Safety Glass complying to national & international standards as well as N Part glazing regulations.
- Sliding Door leaves are completely reversible.
- Sliding Door stainless steel rollers ensure a smooth gliding action and are made of durable long lasting materials.
- Design of the Sliding Door accommodates wool pile to ensure the door is draught resistant, the threshold & high rise interlock meet the highest 1/175 regulations.
- The Sliding Door can be coupled to the iBuild sidelight to allow for ventilation whilst the door is closed.
- A Cylinder lock & Night latch can be fitted as an additional extra.
- Fitting instructions are provided in the hardware pack.

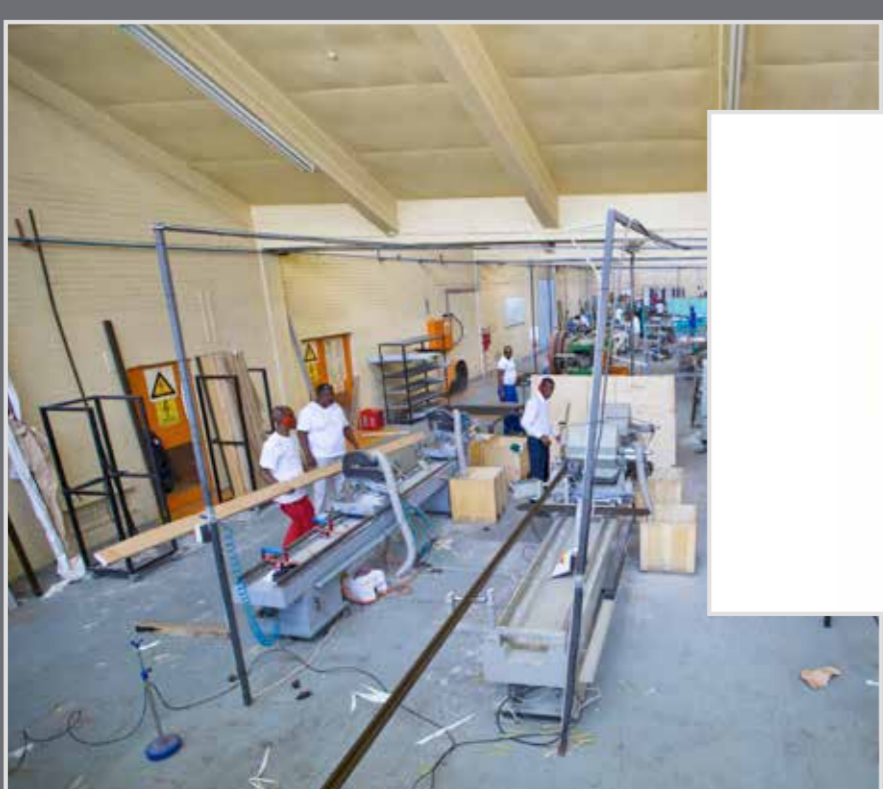

COST SAVING



NO WEATHERING
OR RUSTING



QUICK AND EASY
TO INSTALL



LOW
MAINTENANCE

Windows and doors available in the following colours:

NATURAL

BRONZE

Please note that the colour swatches used is only for illustrative purposes and not exact replica of final product colour.